

Remote Monitoring for Business

ALTA® Wireless 200 DC Voltage Detection

General Description

[ALTA® Wireless DC Voltage Detection Sensors](#) detect the presence or absence of DC voltage up to 200 volts.

Key Features

- ▶ Detects presence or absence of voltage
- ▶ Maximum detection voltage: 200 VDC
- ▶ Minimum detection voltage: 2.3 VDC
- ▶ Triggers on state change
- ▶ Reverse voltage protection up to 200 VDC

Principles of Operation

The ALTA Wireless DC Voltage Detection Sensor can be connected to the signal (red) and ground (black) terminals of any DC electrical device. The sensor will trigger on the state change from voltage presence to absence and vice versa.

When a state change is detected, the sensor reports its state—No Voltage or Voltage Detected—to the gateway, making the data available in iMonnit or another approved data service.

If no change is observed within the user-configurable time interval or Heartbeat, the state is continuously reported on that interval. Notifications can also be set up through the online system to alert the user on either state or on the transition of states.

Example Applications

- ▶ Battery Power
- ▶ Relays/Switches
- ▶ Appliances
- ▶ Adapters
- ▶ Solar
- ▶ Power Supplies
- ▶ Sump Pumps
- ▶ [Additional applications](#)


Features of Monnit ALTA Sensors

- Wireless range of 2,000+ feet through 18+ walls¹
- Frequency-Hopping Spread Spectrum (FHSS)
- Best-in-class interference immunity
- Best-in-class power management for longer battery life²
- Encrypt-RF® Security (Diffie-Hellman Key Exchange + Advanced Encryption Standard (AES)-128 Cipher Block Chaining (CBC) for sensor data messages)
- Sensor logs 2000 to 4000 readings if the gateway connection is lost (non-volatile flash, persists through power cycling):
 - 10-minute Heartbeats = ~ 22 days
 - 2-hour Heartbeats = ~ 266 days
- Automatic over-the-air updates to sensor firmware (future-proof)
- Free iMonnit Basic Online Wireless Sensor Monitoring and Notification System to configure sensors, view data, and send alerts via SMS text, email, and voice call

¹ Actual range may vary depending on the environment and gateway.

² Battery life is determined by the sensor reporting frequency and other variables. Other power options are also available.

Wireless Range Comparison

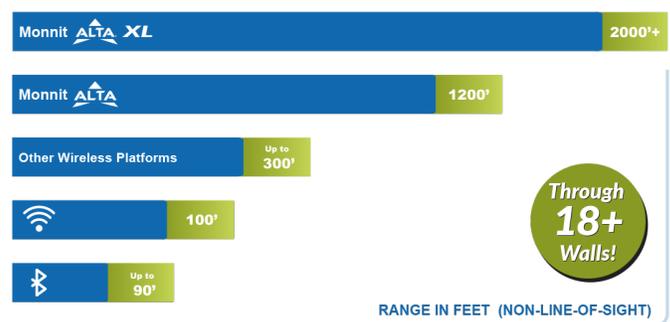


Technical Specification | ALTA® Wireless 200 VDC Voltage Detect


| | | |
|----------------|---------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Voltage Detect | Absolute Maximum Input Voltage | 200 VDC ¹ |
| | Absolute Minimum Input Voltage | -200 VDC ¹ |
| | Response Time | ~2 Seconds |
| | Minimum Detection Voltage | Present above ~2.3 VDC, Absent below ~1.8 VDC |
| | Indeterminate Detection Region | (Indeterminate from 1.8 to 2.3 VDC) ² |
| | Open circuit reading | Voltage absent |
| | Input Impedance | 2 MOhm |
| Lead | Cable length | Standard: 0.3 m (1 ft) |
| | Wire count | 2-conductor (red/black) |
| | Wire gauge | 22 AWG |
| | Conductor material | Stranded Copper 7/30 |
| | Insulation | PVC, 0.010" |
| | Shield | No |
| | Jacket | PVC (black) |
| | Overall Diameter | 4.2 mm (0.164") |
| | Ratings / Approvals | NEC (UL) Type CM, UL AWM Style 2464, CSA AWM FT4, RoHS/Reach Compliant |
| | Temperature Rating | -20°C to 85°C (-4°F to 185°F) ³ |
| | Voltage Rating | 300 V Max |
| | Dielectric Strength | 1500 V RMS |
| ALTA Wireless | Data logging | Sensor logs 2000 to 4000 readings if gateway connection is lost (non-volatile flash, persists through power cycling): 10-minute Heartbeats = ~22 days - 2-hour Heartbeats = ~266 days |
| | Wireless protocol | ALTA Proprietary Frequency-Hopping Spread Spectrum (FHSS) |
| | Wireless transmission power (EIRP) | 50 mW (900MHz), 25 mW (868 MHz), 10 mW (433 MHz) |
| | Wireless range | 2,000+ ft. through 18+ walls with the ALTA XL® Gateway |
| General | Security | Encrypt-RF® (256-bit key exchange and AES-128 CTR) |
| | Battery voltage range | 2.0 to 3.8 VDC |
| | Operating altitude (non-pressurized environments) | -15.2 to 1,982 m (-50 to 6,500 ft) ⁴ |
| | Storage altitude (non-pressurized environments) | -15.2 to 3,048 m (-50 to 10,000 ft) ⁴ |
| | Operating humidity | 5 to 85% RH (non-condensing) |
| General | Certifications | 900 MHz sensors: FCC ID: ZTL-G2SC1 and IC: 9794A-G2SC1 . 868 and 433 MHz sensors tested and comply with: EN 55032: 2015/A11:2020 ; EN 55035:2017/A11:2020 ; ETSI EN 300 220 V3.2.1 (2018-06) ; ETSI EN 301 489-3 V2.2.0. (2021-11) ; and ETSI EN 303 645 . All sensors tested and comply with: EN 61010-1 and EN 60950 and meet RoHS 2015/863 and REACH 224 (June 2022) , according to IEC 63000:2016/AMD1:2022 . |
| | |     |

1. Connecting to power sources over 200 VDC can damage the hardware.
2. The sensor may indicate present or absent in the indeterminate range.
3. Temperatures colder than the rating are acceptable if the cable is not moving or vibrating.
4. Operating and storage altitude without DC power supply is -30.48 to 9144 m (-100 to 30000 ft).

The meter reports Voltage Present or No Voltage Present.


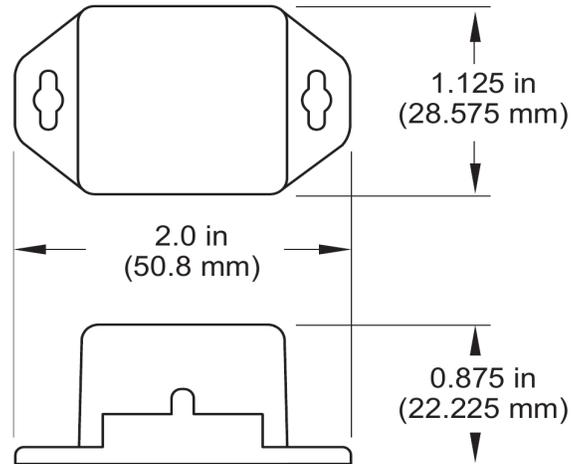


PinchPower™ Enclosures

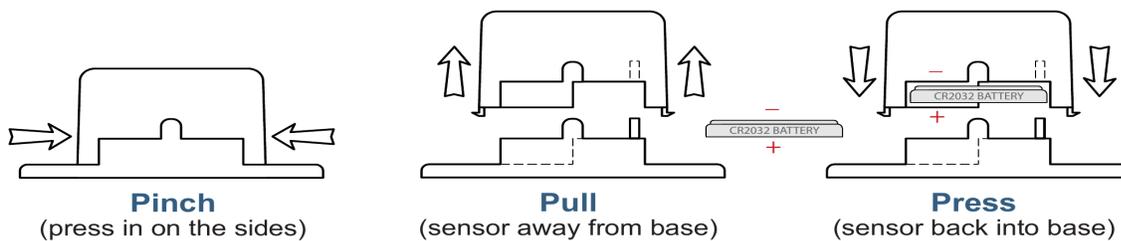




| Technical Specifications ALTA® Commercial 200 VDC Voltage Detect | |
|--------------------------------------------------------------------|--------------------------------------------------------------|
| Battery ¹ | 1x 3.0V CR2032 Button Cell, 100 mAh |
| Battery Life | 2+ years expected |
| Operating temperature range (non-leaded measurement range) | 10°C to 50°C (50°F to 122°F) |
| Wireless antenna type | 1/4-wave, 20 gauge wire whip, 3.5" (900/868MHz), 7" (433MHz) |
| Weight | 0.7 oz. (19.84 g) |

1. Hardware cannot withstand negative voltage. Please take care when inserting and removing battery.

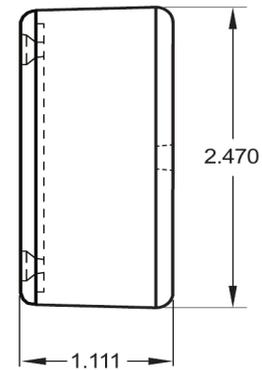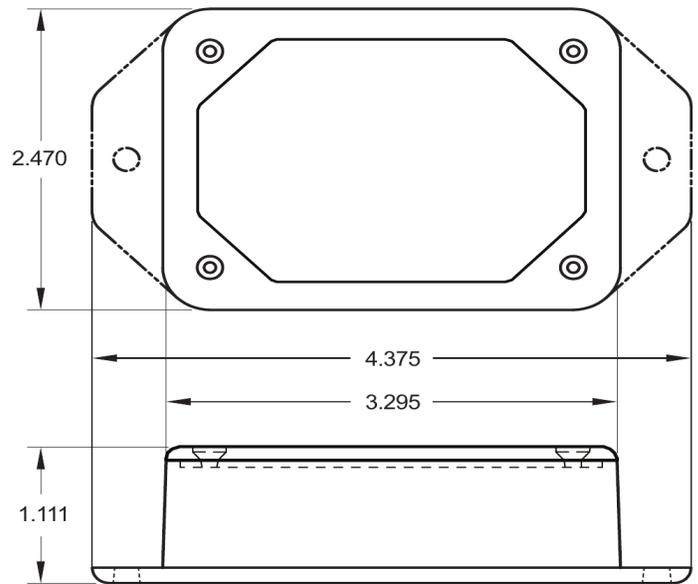

| Technical Specifications ALTA® Enterprise 200 VDC Voltage Detect | |
|-------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Battery ¹ | 2x 1.5V AA Alkaline, 1500 mAh, (standard) 2x 1.5V AA Lithium, 3000 mAh, (optional) |
| Battery Life | 10+ years expected |
| External line-power option ² | Input voltage: 5.0-12.0 V Power jack: 2.1 x 5.5 mm barrel, center positive |
| Operating temperature range (non-leaded measurement range) ³ | -18°C to 55°C (0°F to 130°F) - AA Alkaline Batteries -25°C to 60°C (-13°F to 140°F) - AA Lithium L91 Batteries 0°C to 40°C (32°F to 104°F) - US 5V Power Supply 10°C to 40°C (50°F to 104°F) - International 5V Power Supply |
| Wireless antenna type | 1/4-wave, 20 gauge wire whip, 3.5" (900/868MHz), 7" (433MHz) |
| Weight | 3.7 oz. (105 g) |

1. Hardware cannot withstand negative voltage. Please take care when inserting and removing batteries.
2. Batteries will provide backup power in the case the external power is removed.
3. Operating below 0°C (-32°F) degrees will reduce battery life.

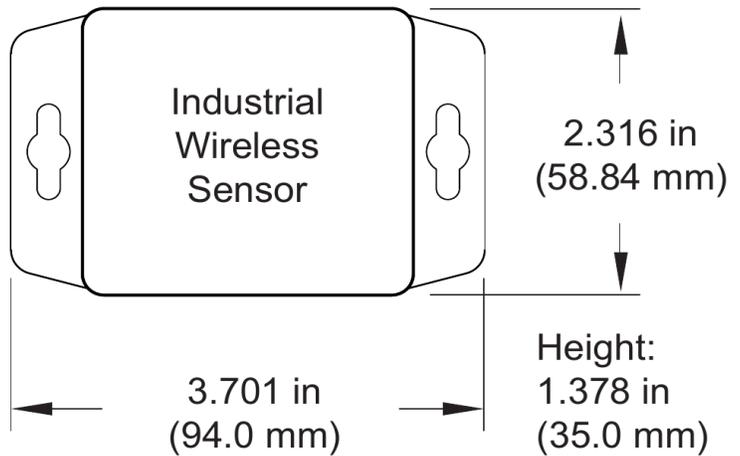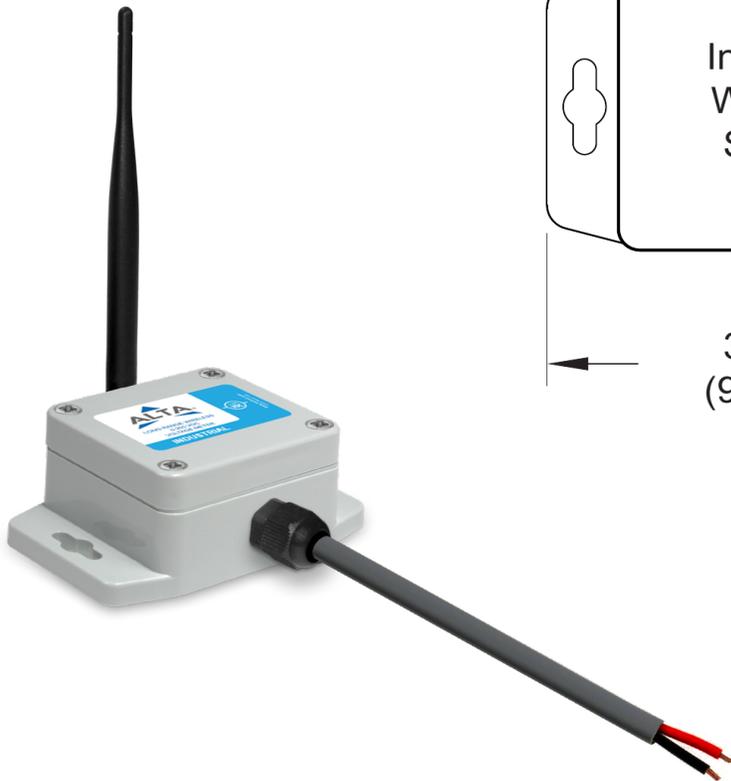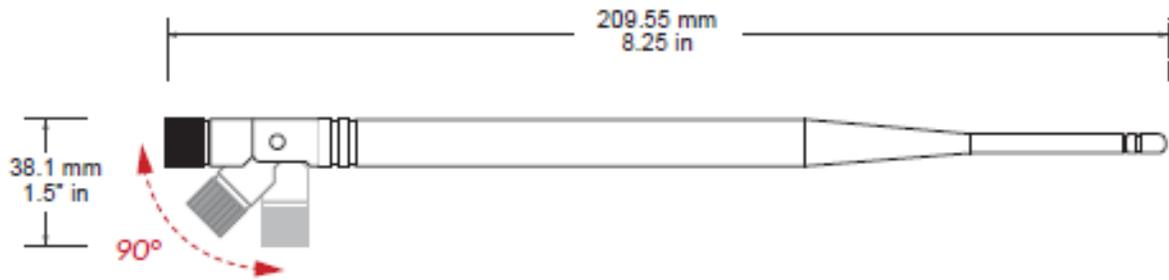

Technical Specifications | ALTA® Industrial 200 VDC Voltage Detect

| | |
|-------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Battery | 1x 3.6V AA Lithium Thionyl Chloride, 1500mAh, pre-installed |
| Battery Life | 10+ years expected |
| Operating temperature range (non-leaded measurement range) ¹ | -40°C to 85°C (-40°F to 185°F) |
| Wireless antenna type | 1/2-wave waterproof dipole with RP-SMA connector and swivel neck; dBi of 3.0 (900/868MHz) or 2.5 (433 MHz); length of 8.27" (210mm) (900/868MHz) or 7.68" (195mm) (433 MHz); diameter at thickest point of 0.55" (14mm) |
| Weight | 4.7 oz. (133 g) |
| Enclosure rating | IP-65 (dust-proof and waterproof but not submersible) NEMA 1, 2, 4, 4x, 12, and 13 rated, sealed, and weatherproof UL Listed to UL508-4x specifications (File E194432) |

1. Operating below 0°C (-32°F) degrees will reduce battery life.

Commercial-Grade Sensors

Monnit commercial-grade sensors are designed for applications in ordinary environments (normal room temperature, humidity, and atmospheric pressure). Do not use these sensors under the following conditions, as these factors can deteriorate the product characteristics and cause failures and burnout.

- Corrosive gas or deoxidizing gas: chlorine gas, hydrogen sulfide gas, ammonia gas, sulfuric acid gas, nitric oxide gas, etc.
- Volatile or flammable gas
- Dusty conditions
- Low-pressure or high-pressure environments
- Wet or excessively humid locations
- Places with salt water, oils, chemical liquids, or organic solvents
- Where there are excessively strong vibrations
- Other places where similar hazardous conditions exist

Use these products within the specified temperature range. Higher temperatures may cause deterioration of the characteristics or the material quality.

Industrial-Grade Sensors | Type 1, 2, 4, 4X, 12, and 13 NEMA-Rated Enclosure

Monnit's industrial sensors are enclosed in reliable, weatherproof NEMA-rated enclosures. Our NEMA-rated enclosures are constructed for indoor and outdoor use and protect the sensor circuitry against the ingress of solid foreign objects like dust and the damaging effects of water.

- Safe from falling dirt
- Protects against wind-blown dust
- Protects against rain, sleet, snow, splashing water, and hose-directed water
- Increased level of corrosion resistance
- Will remain undamaged by ice formation on the enclosure



Monnit Corporation

3400 South West Temple • Salt Lake City, UT 84115 • 801-561-5555
www.monnit.com